




德标波纹管截止阀 DIN BELLOWS GLOBE VALVE

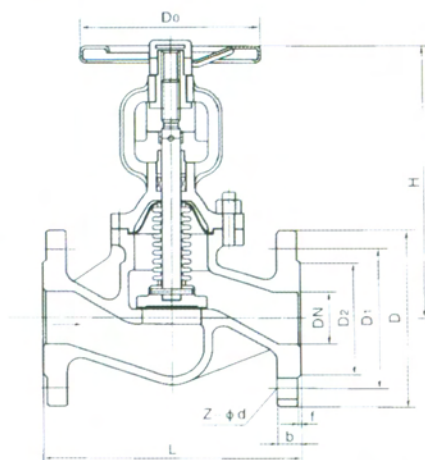

主要外形尺寸和重量 Main Dimensions & Weight

公称通径 DN	主要外形尺寸和连接尺寸 (mm) Main External and Connection Dimension										WT(Kg)
	L	D	D1	D2	b	f	Z-ød	H	H1	D0	
DIN/WJ41H-16C DIN/WJ41W-16P											
15	130	95	65	45	16	2	4-ø14	191	197	120	5
20	150	105	75	58	18	2	4-ø14	191	197	140	7
25	160	115	85	68	18	2	4-ø14	197	205	140	9
32	180	140	100	78	18	2	4-ø18	200	208	160	12
40	200	150	110	88	18	3	4-ø18	218	231	200	16
50	230	165	125	102	20	3	4-ø18	220	233	200	19
65	290	185	145	122	18	3	4-ø18	238	254	240	23
80	310	200	160	138	20	3	8-ø18	257	277	240	30
100	350	220	180	158	20	3	8-ø18	340	365	320	42
125	400	250	210	188	22	3	8-ø18	360	392	360	63
150	480	285	240	212	22	3	8-ø22	390	420	360	90
200	600	340	295	268	24	3	12-ø22	530	580	500	150
DIN/WJ41H-25 DIN/WJ41W-25P											
15	130	95	65	45	16	2	4-ø14	191	197	120	5
20	150	105	75	58	18	2	4-ø14	191	197	160	7
25	160	115	85	68	18	2	4-ø14	197	205	160	9
32	180	140	100	78	18	2	4-ø18	200	208	160	12
40	200	150	110	88	18	3	4-ø18	218	231	200	19
50	230	165	125	102	20	3	4-ø18	220	233	200	24
65	290	185	145	122	22	3	4-ø18	238	254	280	33
80	310	200	160	138	24	3	8-ø18	257	277	280	44
100	350	235	220	158	24	3	8-ø22	340	365	320	60
125	400	270	250	188	26	3	8-ø26	360	392	360	72
150	480	300	295	218	28	3	8-ø26	390	430	360	98
200	600	360	310	278	30	3	12-ø26	530	580	500	169
DIN/WJ41H-40 DIN/WJ41W-40P											
15	130	95	65	45	16	2	4-ø14	191	197	120	5
20	150	105	75	58	18	2	4-ø14	191	197	160	7
25	160	115	85	68	18	2	4-ø14	197	205	160	9
32	180	140	100	78	18	2	4-ø18	200	208	160	12
40	200	150	110	88	18	3	4-ø18	218	231	200	19
50	230	165	125	102	20	3	4-ø18	220	233	200	23
65	290	185	145	122	22	3	4-ø18	238	254	280	33
80	310	200	160	138	24	3	8-ø18	257	277	280	43
100	350	235	220	162	24	3	8-ø22	340	365	320	69
125	400	270	250	188	26	3	8-ø26	360	392	360	98
150	480	300	295	218	28	3	8-ø26	390	430	360	170