




全径浮动球阀 FULL BORE FLOATING BALL VALVE

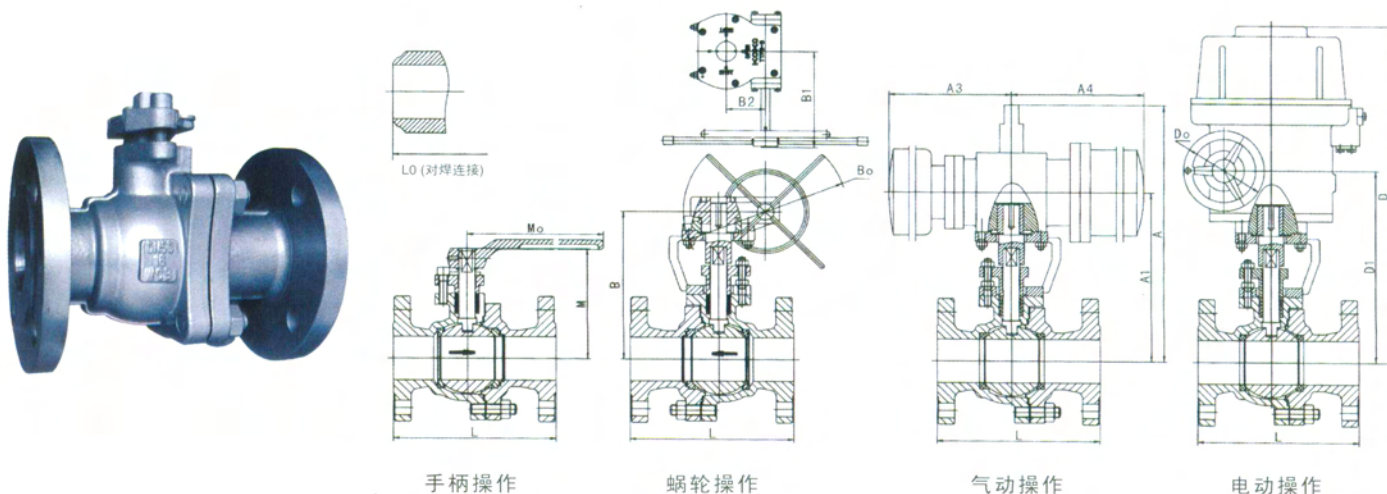

主要外形尺寸和重量 Main Dimensions & Weight

PN1.6MPa CLASS 150

DN	mm	15	20	25	40	50	65	80	100	125	150	200
NPS	in	1/2	3/4	1	1 1/2	2	2 1/2	3	4	5	6	8
L	RF	108	117	127	165	178	190	203	229	356	394	457
LO	BW	140	152	165	190	216	241	283	305	381	457	521
手动	M	59	63	75	95	107	142	152	178	252	272	342
	MO	130	130	160	230	230	400	640	650	1050	1050	1410
蜗轮 蜗杆	B	-	-	-	-	-	-	-	-	-	292	398
	BO	-	-	-	-	-	-	-	-	-	400	600
	B1	-	-	-	-	-	-	-	-	-	350	350
	B2	-	-	-	-	-	-	-	-	-	115.5	115.5
气动	A	200	204	257	264	340	370	389	594	646	646	781
	A1	122	126	162	169	209	239	258	337	437	437	537
	A3	326	326	347	420	426	426	590	523	610	610	885
	A4	136	136	181	181	257	257	257	287	378	378	530
电动	D	-	-	-	-	472	486	579	595	650	739	799
	D1	-	-	-	-	377	391	484	500	500	589	649
	D0	-	-	-	-	190	190	190	190	400	400	400
重量 Kg (RF)	手动	2.5	3	5	7	10	15	19	33	58	93	160
	气动	10	15.7	19.5	42.8	46.9	50.5	70	92.7	160.7	183.5	276
	电动	-	-	-	-	32	35.6	44	55	93	128	195

全径浮动球阀

FULL BORE FLOATING BALL VALVE



主要外形尺寸和重量 Main Dimensions & Weight

PN2.5、4.0MPa CLASS 300

DN	mm	15	20	25	40	50	65	80	100	125	150	200
NPS	in	1/2	3/4	1	1/2	2	2/2	3	4	5	6	8
L	RF	140	152	165	190	216	241	283	305	381	403	502
LO	BW	140	152	165	190	216	241	283	305	381	457	521
手 动	M	59	63	75	95	107	142	152	178	252	272	342
	MO	130	130	160	230	230	400	400	650	1050	1050	1410
蜗 轮 蜗 杆	B	-	-	-	-	-	-	-	-	-	292	398
	BO	-	-	-	-	-	-	-	-	-	400	600
	B1	-	-	-	-	-	-	-	-	-	350	421
	B2	-	-	-	-	-	-	-	-	-	115.5	171
气 动	A	200	204	257	264	340	379	452	594	646	744	920
	A1	122	126	162	169	209	248	295	375	437	500	615
	A3	326	326	347	420	426	426	590	523	610	610	885
	A4	136	136	181	181	257	257	257	287	378	378	530
电 动	D	-	-	-	-	472	486	579	595	650	739	799
	D1	-	-	-	-	377	391	484	500	500	589	649
	D0	-	-	-	-	190	190	190	190	400	400	400
重 量 Kg (RF)	手动	3	4	6	11	15	24	30	55	81	118	200
	气动	10	15.7	20	40.9	43.9	51.9	68	99.4	177.5	207.5	381
	电动	-	-	-	-	29	37	42	77	116	143	235


主要外形尺寸和重量 Main Dimensions & Weight

PN6.4、10.1MPa CLASS 400、600

DN	mm	15	20	25	40	50	65	80	100
NPS	in	1/2	3/4	1	1/2	2	2/2	3	4
L	RF	165	190	216	241	292	330	356	406(432)
LO	BW	165	190	216	241	292	330	356	406(432)
手 动	M	59	63	75	95	142	154	184	209
	MO	160	160	230	400	400	650	650	1050
蜗 轮 蜗 杆	B	-	-	-	-	-	-	292	398
	BO	-	-	-	-	-	-	400	600
	B1	-	-	-	-	-	-	350	421
	B2	-	-	-	-	-	-	115.5	171
气 动	A	200	204	241	264	340	379	452	584
	A1	122	145	146	169	209	248	295	375
	A3	283	283	283	350	590	590	523	610
	A4	136	181	181	181	257	257	287	378
电 动	D	-	-	-	-	472	599	599	632
	D1	-	-	-	-	377	4491	449	472
	D0	-	-	-	-	190	190	190	190
重 量 Kg (RF)	手动	8	11	15	19	25	32	48	76
	气动	17.2	21	24	32	68	75	101.3	177.5
	电动	-	-	-	-	60	67	83	111



全径固定球阀 FULL BORE TRUNNION MOUNTINED BALL VALVE

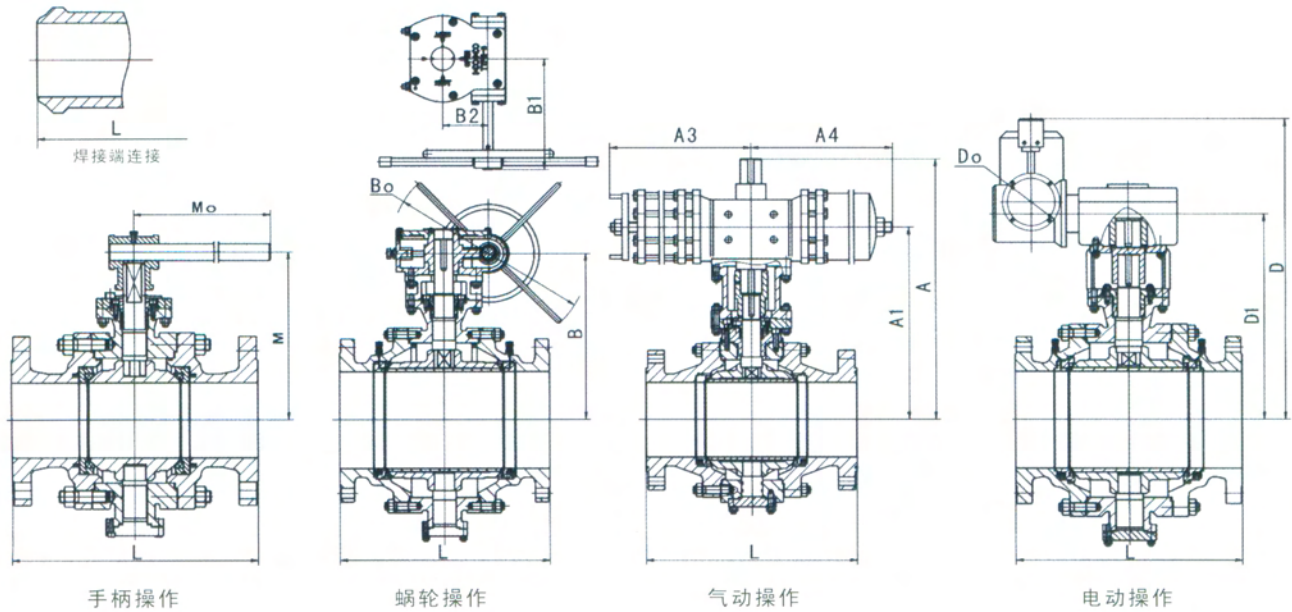

主要外形尺寸和重量 Main Dimensions & Weight

PN1.6MPa CLASS 150

尺寸		L			d	手动		蜗轮蜗杆传动				气动				电动			重量 Kg	
DN	NPS	RF	WE	RJ		M	M0	B	B0	B1	B2	A	A1	A3	A4	D	D1	D0	RF	WE
50	2	178	216	191	49	107	230	-	-	-	-	217	174	89	181	-	-	-	12	11
65	2 1/2	191	241	203	62	125	400	-	-	-	-	308	248	148	257	-	-	-	16	15.3
80	3	203	283	216	74	152	400	-	-	-	-	318	258	148	257	-	-	-	22	21.3
100	4	229	305	241	100	178	650	-	-	-	-	407	322	287	287	-	-	-	35	34
125	5	356	381	-	125	252	1050	-	-	-	-	480	395	287	287	-	-	-	58	55.4
150	6	394	457	406	150	272	1050	378	400	200	106	562	457	378	378	554	337	508	74	72
200	8	457	521	470	201	-	-	421	400	200	108	700	595	378	378	606	421	508	205	201
250	10	533	559	546	252	-	-	482	400	200	108	735	630	378	378	667	482	508	322	310
300	12	610	635	622	303	-	-	549	600	330	144	858	728	530	530	734	549	508	460	447
350	14	686	762	699	334	-	-	582	600	330	144	1013	883	530	530	784	582	508	576	536
400	16	762	838	775	385	-	-	687	800	370	220	1319	1154	680	680	889	687	508	864	814
450	18	864	914	876	436	-	-	730	800	370	220	1389	1224	680	680	981	730	305	1280	1210
500	20	914	991	927	487	-	-	772	800	370	220	1459	1294	680	680	1023	772	305	1600	1500
600	24	1067	1143	1080	589	-	-	995	800	515	279	1060	915	1455	1455	1268	995	305	3540	3000
650	26	1143	1245	-	633	-	-	1022	800	515	279	1234	1089	1455	1455	1334	1071	305	3930	3240
700	28	1245	1346	-	684	-	-	1088	800	515	279	1140	980	1665	1665	1459	1155	305	4500	3710
750	30	1295	1397	-	735	-	-	1153	800	515	279	1195	1035	1665	1665	1515	1211	305	5370	4530
800	32	1372	1524	-	779	-	-	1223	800	570	368	1338	1149	1960	1960	1649	1316	458	5940	4870
850	34	1473	1626	-	830	-	-	1307	800	570	368	-	-	-	-	1694	1361	458	6615	5305
900	36	1524	1727	-	874	-	-	1374	800	570	368	-	-	-	-	1766	1433	458	7540	6010
1000	40	1753	1956	-	976	-	-	1468	960	575	220	-	-	-	-	1854	1521	458	9320	7400
1050	42	1855	2083	-	1020	-	-	1532	960	575	220	-	-	-	-	2036	1586	610	14450	12150
1200	48	2134	2388	-	1166	-	-	1670	960	575	220	-	-	-	-	2185	1735	610	19200	16000
1350	54	-	-	-	1312	-	-	1858	960	575	220	-	-	-	-	2330	1800	610	-	-
1400	56	2388	2388	-	1360	-	-	1920	960	630	295	-	-	-	-	2395	1945	610	29400	24500
1500	60	2540	2540	-	1458	-	-	2070	960	630	295	-	-	-	-	2504	2054	610	36000	30000

表格I栏中, RF表示突面法兰结构长度, WE表示焊接结构长度, RJ表示环连接形式结构长度。

PN2.5、4.0MPa CLASS 300

尺寸		L			d	手 动		蜗轮蜗杆传动				气 动				电 动			重量 Kg	
DN	NPS	RF	WE	RJ		M	M0	B	B0	B1	B2	A	A1	A3	A4	D	D1	D0	RF	WE
50	2	216	216	232	49	107	230	-	-	-	-	234	174	148	257	-	-	-	15	11
65	2 1/2	241	241	257	62	125	400	-	-	-	-	308	248	148	257	-	-	-	24	18
80	3	283	283	298	74	152	400	-	-	-	-	343	258	148	287	-	-	-	30	22
100	4	305	305	321	100	178	650	-	-	-	-	407	322	287	287	-	-	-	55	45
125	5	381	381	-	125	252	1050	-	-	-	-	500	395	378	378	-	-	-	87	69
150	6	403	457	419	150	272	1050	378	400	200	106	562	457	378	378	522	337	508	118	98
200	8	502	521	517	201	-	-	421	400	200	108	700	595	378	378	606	421	508	255	225
250	10	568	559	584	252	-	-	482	600	330	144	760	630	530	530	667	482	508	370	330
300	12	648	635	664	303	-	-	549	600	330	144	858	728	530	530	751	549	508	533	493
350	14	762	762	778	334	-	-	582	800	370	220	1048	883	680	680	784	582	305	640	600
400	16	838	838	854	385	-	-	687	800	370	220	1319	1154	680	680	938	687	305	1030	930
450	18	914	914	930	436	-	-	730	800	370	220	1369	1224	1455	1455	981	730	305	1542	1402
500	20	991	991	1010	487	-	-	772	800	515	279	1459	1294	1455	1455	1045	772	305	2100	1900
600	24	1143	1143	1165	589	-	-	995	800	515	279	1075	915	1665	1665	1268	995	305	3430	2860
650	26	1245	1245	1270	633	-	-	1022	800	515	279	1249	1089	1665	1665	1375	1071	305	4340	3620
700	28	1346	1346	1372	684	-	-	1088	800	515	279	1140	980	1665	1665	1459	1155	305	4960	4140
750	30	1397	1397	1422	735	-	-	1153	800	570	368	1195	1035	1960	1960	1515	1211	305	5950	4960
800	32	1524	1524	1553	779	-	-	1223	800	570	368	1338	1149	1960	1960	1649	1316	458	6760	5640
850	34	1626	1626	1654	830	-	-	1307	800	570	268	-	-	-	-	1694	1361	458	8280	6900
900	36	1727	1727	1756	874	-	-	1374	960	575	220	-	-	-	-	1883	1433	458	9640	8040
1000	40	1930	1930	-	976	-	-	1468	960	575	220	-	-	-	-	1971	1521	458	11730	9680
1050	42	2032	2032	-	1020	-	-	1532	960	630	295	-	-	-	-	2036	1586	610	16300	13700
1200	48	2388	2388	-	1166	-	-	1670	960	630	295	-	-	-	-	2255	1735	610	20160	16800
1350	54	-	-	-	1312	-	-	1858	960	630	295	-	-	-	-	2400	1880	610	-	-
1400	56	2642	2642	-	1360	-	-	1920	960	630	295	-	-	-	-	2465	1945	610	30860	25700
1500	60	2946	2946	-	1458	-	-	2070	960	630	295	-	-	-	-	2574	2054	610	37800	31500

PN6.4 CLASS 400

[illegible]