



三偏心法兰连接蝶阀


TRIPLE OFFSET FLANGE BUTTERFLY VALVE

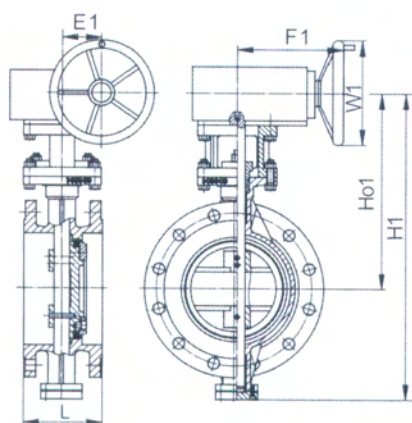

蜗轮蜗杆传动法兰连接蝶阀
Worm Gear Driven Flanged Butterfly Valve

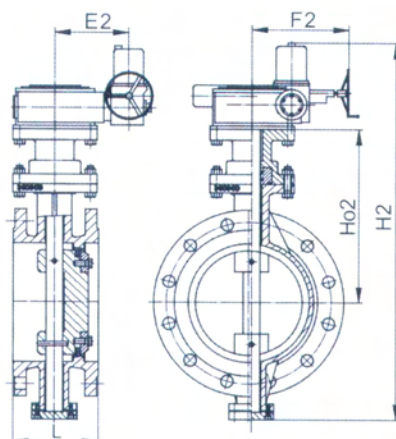

电动法兰连接蝶阀
Electric Flanged Butterfly Valve

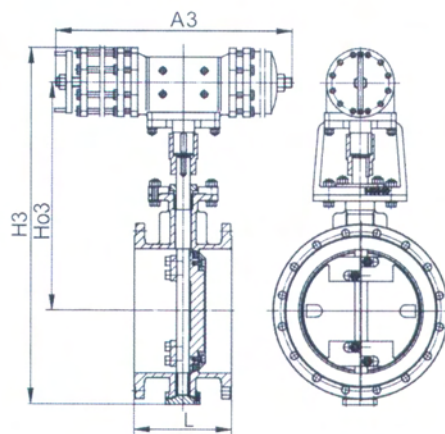

气动法兰连接蝶阀
Pneumatic Flanged Butterfly Valve

主要外形尺寸和重量 Main Dimensions & Weight

PN 1.0MPa

DN	L	蜗轮蜗杆传动					电 动				气 动			重量 Kg
		H1	Ho1	E1	F1	W1	H2	Ho2	E2	F2	H3	Ho3	A3	蜗轮传动
50	108	295	195	32	125	160	316	218	156	126	-	-	-	12
65	112	313	205	32	125	180	336	228	156	126	-	-	-	13
80	114	330	215	32	125	180	353	238	156	126	-	-	-	15
100	127	350	225	32	150	200	380	255	168	126	-	-	-	17
125	140	408	265	44	160	200	413	270	168	126	-	-	-	27
150	140	446	285	44	160	350	466	305	250	126	-	-	-	29
200	152	527	345	64	170	350	554	362	250	175	740	367	275	45
250	165	595	375	64	170	400	630	410	250	175	900	443	378	69
300	178	679	430	64	190	400	693	444	290	268	990	493	378	86
350	190	744	465	94	190	600	771	492	290	268	1155	575	378	122
400	216	855	540	94	190	600	837	522	290	268	1205	600	530	150
450	222	910	570	132	230	600	892	552	290	268	1290	643	530	214
500	229	972	605	132	230	800	973	606	290	268	1395	705	530	263
600	267	1137	705	185	275	800	1098	666	410	460	1665	838	530	333
700	292	1255	765	185	275	400	1252	762	410	460	1882	942	680	473
800	318	1425	870	234	320	400	1575	1020	305	610	2093	1066	680	655
900	330	1531	925	234	320	400	1734	1075	305	610	2175	1210	1480	844
1000	410	1708	1035	296	370	400	1908	1235	385	650	2245	1275	1560	1078
1200	470	1941	1155	296	370	600	2121	1355	385	650	2375	1385	1830	1729
1400	530	2263	1350	410	475	600	2512	1600	535	745	2530	1510	1890	2247
1600	600	2507	1475	410	475	600	2857	1725	535	745	2779	1639	1960	3059
1800	670	2824	1670	506	570	600	3124	1970	660	820	-	-	-	3717
2000	950	3075	1780	506	570	800	3375	2080	660	820	-	-	-	4480
2200	1000	3481	2051	636	660	800	3780	2351	825	920	-	-	-	5880
2400	1110	3705	2125	636	660	800	3933	2425	825	920	-	-	-	7140



三偏心法兰连接蝶阀 TRIPLE OFFSET FLANGE BUTTERFLY VALVE

主要外形尺寸和重量 Main Dimensions & Weight

PN 1.6 MPa

DN	L	蜗轮蜗杆传动					电动				气动			重量 Kg
		H1	HO1	E1	F1	W1	H2	HO2	E2	F2	H3	HO3	A3	蜗轮传动
50	108	290	175	32	125	160	316	218	156	126	-	-	-	19
65	112	295	195	63	140	180	336	228	156	126	-	-	-	22
80	114	320	185	63	140	180	513	265	178	180	-	-	-	32
100	127	342	195	63	140	200	538	282	178	180	-	-	-	36
125	140	365	209	63	140	200	560	295	178	180	-	-	-	39
150	140	415	243	63	140	350	605	300	178	180	-	-	-	43
200	152	510	263	84	150	350	749	321	235	370	695	327	275	57
250	165	567	295	84	150	400	803	330	235	370	750	355	275	88
300	178	665	342	108	200	400	880	365	235	370	955	472	378	109
350	190	739	385	108	200	600	960	410	235	370	1033	515	378	144
400	216	825	430	152	240	600	1032	445	235	370	1185	595	530	200
450	222	910	469	152	240	600	1118	487	235	370	1270	632	530	238
500	229	990	500	168	300	800	1190	520	235	370	1335	665	530	326
600	267	1210	618	192	320	800	1380	625	235	370	1642	829	680	466
700	292	1475	746	338	237	400	1582	745	245	515	1785	905	680	592
800	318	1600	810	338	237	400	1713	810	245	515	1915	970	680	917
900	330	1870	1000	530	785	400	1870	875	360	540	1964	1239	1480	1078
1000	410	2000	1065	530	785	400	2000	940	360	540	2096	1306	1770	1393
1200	470	2215	1170	530	785	600	2118	1060	360	540	2333	1418	1830	1855
1400	530	2430	1319	650	865	600	2328	1325	385	565	2591	1546	1890	2457
1600	600	2700	1443	650	865	600	2550	1450	385	565	2908	1738	2210	3360
1800	670	2938	1595	650	865	600	2816	1598	300	770	-	-	-	-
2000	950	3210	1743	650	865	800	3065	1743	684	794	-	-	-	-
2200	1000	3481	2051	636	660	800	3780	2351	825	920	-	-	-	-
2400	1110	3705	2125	636	660	800	3933	2425	825	920	-	-	-	-

PN 2.5MPa

DN	L	蜗轮蜗杆传动					电动				气动			重量 Kg
		H1	HO1	E1	F1	W1	H2	HO2	E2	F2	H3	HO3	A3	蜗轮传动
50	108	290	175	63	140	180	316	218	156	126	-	-	-	19
65	112	295	185	63	140	200	336	228	156	126	-	-	-	22
80	114	320	195	63	140	200	552	265	178	180	-	-	-	32
100	127	350	200	63	140	350	558	290	178	180	-	-	-	36
125	140	375	210	63	140	350	610	305	178	180	-	-	-	39
150	140	425	245	84	150	400	765	315	178	180	-	-	-	42
200	152	526	270	84	150	400	820	304	235	370	740	367	275	67
250	165	590	302	108	200	600	910	336	235	370	890	443	278	98
300	178	695	360	108	200	600	1000	386	235	370	985	495	378	116
350	190	789	420	152	240	600	1055	425	235	370	1155	575	330	175
400	216	848	435	152	240	800	1108	456	235	370	1206	603	530	228
450	222	943	475	168	300	800	1140	490	235	370	1284	643	530	312
500	229	1079	550	192	320	400	1238	552	235	370	1390	705	535	354
600	267	1352	675	338	237	400	1399	635	245	515	1660	835	680	515
700	292	1495	759	338	237	400	1611	750	360	540	-	-	-	686
800	318	1640	835	530	785	400	1782	820	360	540	-	-	-	1155
900	330	1765	886	530	785	600	1915	886	385	565	-	-	-	1337
1000	410	1885	945	530	785	600	2040	945	385	565	-	-	-	1617
1200	470	2100	1055	650	865	600	2184	1053	400	770	-	-	-	2247
1400	530	2325	1163	650	865	600	2375	1164	684	794	-	-	-	-