

蒸汽减压阀
STEAM RELIEF PRESSURE VALVE




概述 Overview

Y43H蒸汽减压阀适用于蒸汽管路上。通过减压阀的调节，可使进口压力降至某一需要的出口压力，当进口压力或流量变动时，减压阀依靠介质本身的能量可自动保持出口压力在小范围内波动

Y43H steam relief pressure valve is suitable for the steam pipework. Through the regulation of the relief pressure valve, can make the inlet pressure drop to some one export pressure needed, at the change, relief pressure valve rely on energy; medium of itself can keep pressure of exporting in fluctuate as inlet pressure or flow among a small circle automatically.

主要零件材料 Material For Main Parts

零件名称 Part name	材料 Material
阀体、阀盖 Valve body, valve covering	灰铸铁、铸钢、不锈钢 Gray casting iron, casts steel, stainless steel
付阀瓣、付阀座、膜片、主阀瓣、主阀座、活塞 One pair of valves one, one pair of valves seat, membrane Slice Main valve one, main valve seat , piston	不锈钢 stainless steel
付阀弹簧、主阀弹簧 One pair of valves spring, main valve spring	铬钒钢 Chromium vanadium steel
调节弹簧 Regulate the spring	硅锰钢 Silico—manganese steel
活塞环 Piston-ring	合金铸铁 Alloy casting iron

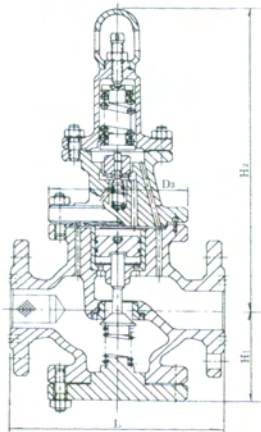

主要外形尺寸 Main external dimension
(法兰尺寸 按JB/T79-94标准)

公称压力 PN(MPa)	公称通径 DN(mm)	尺 寸 (mm)		
		L	H1	H2
1.6	20	160	89	312
	25	180	101	315
	32	200	107	320
	40	220	113	325
	50	250	120	335
	65	260	125	340
	80	310	140	360
	100	350	150	390
	125	400	190	415
	150	450	205	440
	200	500	220	475
	250	600	270	545
2.5	300	800	335	575
	350	850	390	650
	400	900	430	705
	25	200	101	315
	32	200	107	320
	40	220	113	325
	50	250	120	335
	65	260	125	340
	80	310	140	360
	100	350	150	390
	125	400	190	425
	150	450	210	445
4.0	200	500	245	485
	250	600	270	545
	300	800	335	575
	350	850	390	650
	400	900	430	710
	25	200	101	315
	32	220	107	320
	40	240	113	325
	50	270	120	335
	65	280	140	365
	80	330	150	385
	100	380	150	385
6.3 (6.4)	125	450	190	425
	150	500	210	445
	200	560	245	485
	25	200	110	370
	32	220	125	380
	40	240	130	395
	50	270	135	405
	65	300	145	410
	800	330	170	445
	100	380	175	455
	125	450	245	504
	150	500	280	555
	200	560	310	581