


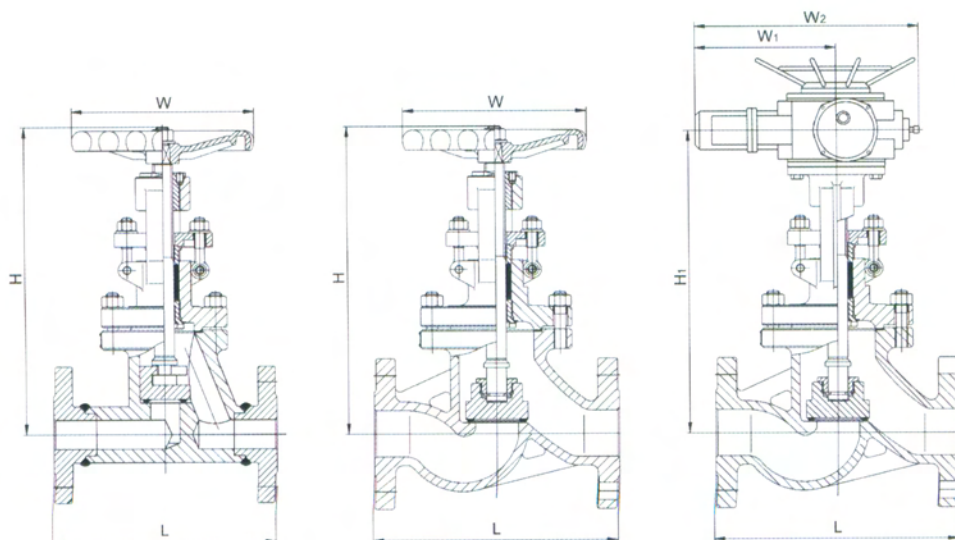

主要外形尺寸和重量 Main Dimensions & Weight

压力 Pressure	规格 Size	尺寸 Dimensions						电装 Operator	重量 Weight (Kg)		Cv值
		L	H	W	H1	W1	W2		手动	电动	
PN1.6	10	130	198	120	-	-	-	-	4.7	-	-
	15	130	218	120	-	-	-	-	5.2	-	-
	20	150	258	140	-	-	-	-	7.1	-	-
	25	160	275	160	-	-	-	-	7.4	-	-
	32	180	280	180	-	-	-	-	8.5	-	-
	40	200	330	200	-	-	-	-	12.5	-	-
	50	230	350	240	645	371	590	DZW10A	14	48	-
	65	290	355	280	690	371	590	DZW10A	22.5	60	-
	80	310	400	280	715	371	590	DZW10A	29	65	105
	100	350	415	320	770	371	590	DZW15A	32.5	71	189
	125	400	460	360	780	371	590	DZW20A	80	119	381
	150	480	510	400	810	371	590	DZW30A	93.5	210	428
	200	600	710	400	967	515	810	DZW45A	180	320	798
	250	650	786	450	1143	515	810	DZW60A	440	550	1240
PN2.5	300	750	925	500	1292	540	830	DZW90	648	785	1859
	10	130	198	120	-	-	-	-	4.9	-	-
	15	130	218	120	-	-	-	-	5.4	-	-
	20	150	258	140	-	-	-	-	7	-	-
	25	160	275	160	-	-	-	-	7.4	-	-
	32	180	280	180	-	-	-	-	8.5	-	-
	40	200	330	200	-	-	-	-	12.5	-	-
	50	230	350	240	645	371	590	DZW10A	16	50	-
	65	290	355	280	690	371	590	DZW10A	25	62	-
	80	310	400	280	715	371	590	DZW10A	30	67	105
	100	350	415	320	770	371	590	DZW15A	34.5	73	189
	125	400	460	360	780	371	590	DZW20A	89	127	381
	150	480	510	400	875	371	810	DZW30A	98	215	428
	200	600	710	400	967	515	810	DZW45A	180	322	798
	250	650	786	450	1153	515	830	DZW60A	446	585	1240
	300	750	925	500	1292	540	830	DZW90	654	795	1859

注：表中所列电动装置系扬修电装，如需要，公司可根据客户要求选配电装或其他驱动装置。

Note: the electric device listed is from YANGXIU. If requested, other electric devices or drive units may be available.

GB 截止阀

GB GLOBE VALVE



主要外形尺寸和重量 Main Dimensions & Weight

续上表 To be Continued

压力 Pressure	规格 Size	尺寸 Dimensions						电 装 Operator	重量 Weight (Kg)		Cv 值
		L	H	W	H ₁	W ₁	W ₂		手 动 Hand Operated	电 动 Electric	
PN4.0	10	130	198	120	-	-	-	-	4.9	-	-
	15	130	233	120	-	-	-	-	5.7	-	-
	20	150	275	140	-	-	-	-	7	-	-
	25	160	285	160	-	-	-	-	8.8	-	-
	32	180	302	180	-	-	-	-	11.8	-	-
	40	200	355	200	-	-	-	-	16.5	-	-
	50	230	373	240	645	371	590	DZW10A	24	61	-
	65	290	408	280	690	371	590	DZW10A	33	75	-
	80	310	436	320	715	371	590	DZW20A	44	84	105
	100	350	480	360	770	371	590	DZW30A	60	101	189
	125	400	558	400	782	515	810	DZW45A	89	207	381
	150	480	611	400	875	515	810	DZW60A	98	226	428
PN6.4	200	600	720	400	1160	540	830	DZW90	190	399	798
	10	170	198	120	-	-	-	-	5.7	-	-
	15	170	195	140	-	-	-	-	10	-	-
	20	190	228	160	-	-	-	-	13	-	-
	25	210	275	180	-	-	-	-	14.5	-	-
	32	230	325	200	-	-	-	-	19	-	-
	40	260	360	240	-	-	-	-	25	-	-
	50	300	440	280	710	371	590	DZW10A	35	64	-
	65	340	450	320	750	371	590	DZW15A	48	77	-
	80	380	485	360	785	371	590	DZW30A	56	86	105
	100	430	537	400	837	515	810	DZW45A	125	171	189
	125	500	631	400	1031	515	810	DZW60A	131	243	381
PN10.0	150	550	646	450	1066	540	830	DZW90	157	296	428
	200	650	813	500	1213	540	830	DZW120	283	420	798
	10	170	198	120	-	-	-	-	6	-	-
	15	170	202	140	-	-	-	-	11	-	-
	20	190	228	160	-	-	-	-	13.2	-	-
	25	210	250	180	-	-	-	-	14	-	-
	32	230	326	220	-	-	-	-	15	-	-
	40	260	359	240	-	-	-	-	29	-	-
	50	300	414	280	710	371	590	DZW20A	49	81	-
	65	340	434	320	750	371	590	DZW30A	65	102	-
	80	380	547	400	785	515	810	DZW45A	95	175	105
	100	430	621	450	950	515	810	DZW60A	115	194	189
PN16.0	125	500	732	450	1142	540	830	DZW90	149	285	381
	150	550	840	500	1240	540	830	DZW120	310	450	428
	200	650	925	550	1425	565	870	DZW180	590	850	798
	15	170	148	140	-	-	-	-	12.2	-	-
	20	190	156	160	-	-	-	-	15	-	-
	25	210	175	180	-	-	-	-	17	-	-
	32	230	200	200	-	-	-	-	21.4	-	-
	40	260	231	240	-	-	-	-	32	-	-
	50	300	262	250	562	371	590	DZW30A	52	92	-
	65	340	303	320	743	515	810	DZW45A	69	165	-
	80	380	341	400	820	540	830	DZW90	98	216	105
	100	430	485	450	935	540	830	DZW120	119	238	189
PN16.0	125	500	-	-	1180	565	870	DZW180	-	490	381
	150	550	-	-	1290	565	870	DZW250	-	674	428
	200	650	-	-	1495	770	1170	DZW350	-	1120	798

注：表中所列电动装置系扬修电装，如需要，公司可根据客户要求选配电装或其他驱动装置。

Note: the electric device listed is from YANGXIU. If requested, other electric devices or drive unit may be available.